


GigaVUE TA Series

Edge traffic aggregation and distribution visibility for
small to large enterprises and service providers

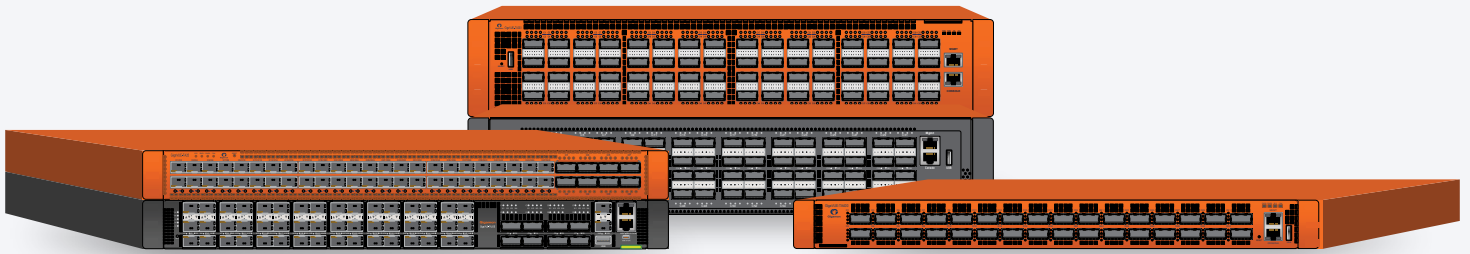

GigaVUE-TA25/TA25E/TA200/TA200E/TA400 products

Key Benefits

Management, Integration, and Installation

- Small footprint with low space, power, and cooling needs
- Rapid programmatic response to detectable events
- Advanced integration with tools, controllers, and other infrastructure systems

Traffic Forwarding for Network and Security Operations

- Optimize the delivery of your network traffic to your monitoring and security tools, enabling:
 - Elimination of contention for network data access
 - Targeting specific flows to specific tools with network awareness
 - Sharing traffic load across multiple tools' instances
- Selectively aggregate and replicate traffic at line rate
- Reuse existing tools for current and new network links
- Scale network coverage and tool deployment with continuous visibility

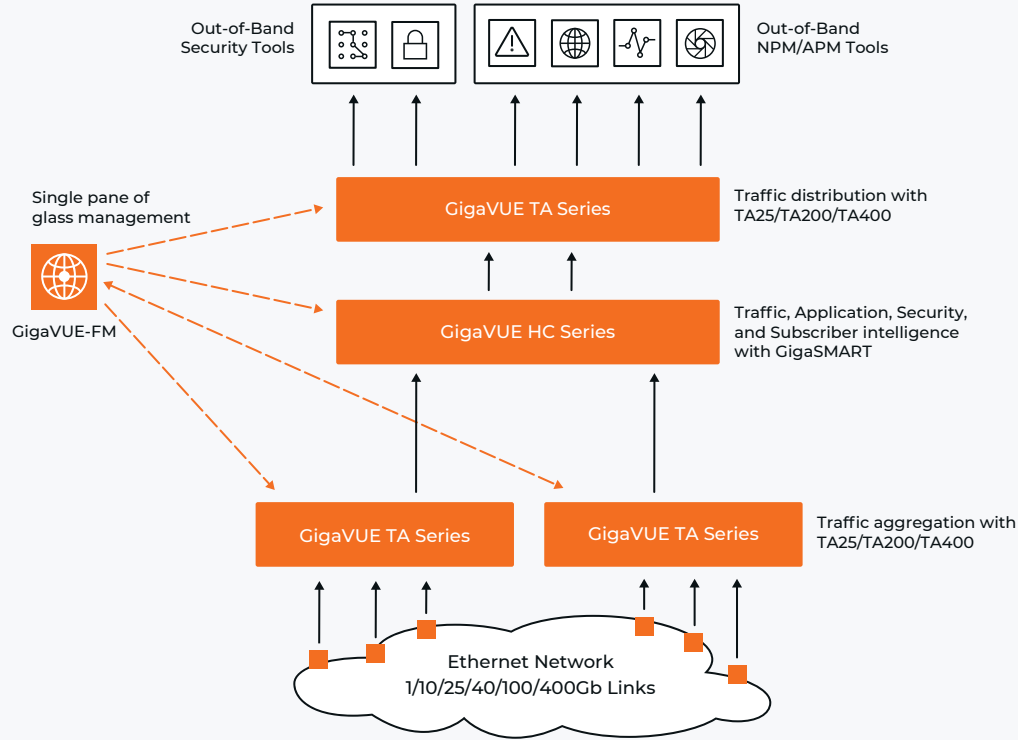


Figure 1. GigaVUE TA Series is used to aggregate traffic from your network, feed GigaVUE HC Series for more intelligent traffic optimization, and then distribute to tools for security, network and application monitoring.

Product Description

The GigaVUE® TA Series of edge network packet brokers is a key component of the Gigamon Deep Observability Pipeline. They are designed to simply aggregate multiple network links and feed the combined traffic to GigaVUE HC Series products, directly to security and monitoring tools, or both.

In addition to physical networks, you gain centralized visibility into cloud and remote sites' network traffic, with tunnel termination and de-encapsulation on all GigaVUE TA Series platforms. You can also perform selective traffic aggregation, replication, filtering, and load balancing on the GigaVUE TA Series.

Gigamon offers a wide set of capabilities for all of your packet brokering needs. GigaVUE TA Series optimizes traffic flow to ensure that only the traffic of interest is

forwarded. The GigaVUE HC Series can then perform traffic, application, and subscriber intelligence functions for more sophisticated traffic handling and forwarding. Lastly, GigaVUE-FM provides single-pane, centralized management and control of both GigaVUE TA and GigaVUE HC Series nodes, and also provides programmable APIs for software-defined visibility.


With up to more than 25Tbps of traffic processing across 32 clustered nodes of GigaVUE TA Series with GigaVUE HC Series, you get network traffic visibility into all data in motion. With Gigamon, you can eliminate traffic overload for tools and easily deploy or upgrade any out-of-band security and monitoring tools.

Use Cases Include:


- Aggregation of multiple SPAN and TAP traffic feeds into higher-speed uplinks
- Extending reach and density of network visibility across the data center
- Visibility into leaf and spine architectures for security and performance monitoring
- Top of rack deployment, consolidating traffic to GigaVUE HC Series node at end of row
- Data center upgrades moving to Cisco BiDi infrastructures

GigaVUE TA Series Family**GigaVUE-TA25/GigaVUE-TA25E**

1RU form factor meets the core traffic aggregation and forwarding needs of small to large 1Gb, 10Gb, 25Gb, 40Gb, and 100Gb networks

**GigaVUE-TA200/GigaVUE-TA200E**

2RU form factor meets the core traffic aggregation and forwarding needs of medium to large size 10Gb, 25Gb, 40Gb, and 100Gb networks

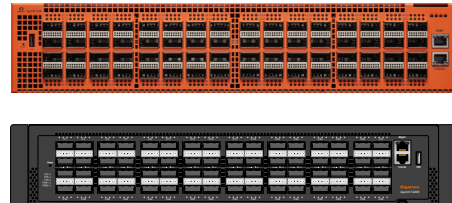**GigaVUE-TA400**

1RU form factor meets the core traffic aggregation and forwarding needs of large to massive size 10Gb, 25Gb, 40Gb, 100Gb, and 400Gb networks



Key Features and Benefits

<p>Network and Traffic Access</p>	<p>Five fixed-port configuration chassis models covering a range of Ethernet port speeds and media with pluggable transceivers:</p> <ul style="list-style-type: none"> • 1000Mb and 10Gb copper • 1Gb, 10Gb, 25Gb, 40Gb, 100Gb multimode and single-mode fiber <p>Compatible with SFP, SFP+, QSFP+, and QSFP28 MSA-compliant transceivers, as offered by Gigamon</p> <ul style="list-style-type: none"> • Scale from low- to high-density systems with a wide range of costeffective options – deploy exactly what is needed • Plug into a variety of network environments with multiple fiber optic transceiver options
<p>Core Intelligence</p>	<p>Flow Mapping[®], including:</p> <ul style="list-style-type: none"> • Aggregation and replication <ul style="list-style-type: none"> – Selective any-to-any port mapping • Filtering <ul style="list-style-type: none"> – Layer 2 to 7 rules – Up to 24k map rules* – Aggregate and egress • Load balancing <ul style="list-style-type: none"> – Layers 2 to 4 hashing criteria – Session stickiness • Access traffic from any link to any tool, even for different link rates • Remove issues with asymmetric routing and LAG • Optimize tools by only forwarding traffic of interest or dropping traffic not of interest • Spread load across multiple tool instances of same type <hr/> <p>Inline Bypass:[‡]</p> <ul style="list-style-type: none"> • Logical bypass for 10G/25G/40G/100G link rates • Aggregate multiple network segments • Filter and load balance towards inline applications/tools • Easily configure simple and complex tool chains • Customizable heartbeat packets for positive (through-path) and negative (block) tests • Provide full visibility for each inline security tool type (e.g., IPS, WAF) • Easily deploy security in layers solutions for both active and passive scenarios • Seamlessly migrate tools from passive out-of-band to active inline mode • Reduce likelihood of network impact due to malfunctioning active inline tools <hr/> <p>Source port tagging with VLAN</p> <ul style="list-style-type: none"> • Pinpoint source of traffic

Core Intelligence cont'd	<p>MAC address modification</p> <ul style="list-style-type: none"> • Obscure original MAC information to meet privacy needs with retained ability to distinguish traffic sources • Allow certain tool types to ingest traffic that meets specific MAC address requirements
	<p>Device and link discovery with ARP and LLDP</p> <ul style="list-style-type: none"> • Reduce time to install and configure GigaVUE nodes
	<p>Clustering* and Fabric Maps* • Enable resilient traffic forwarding</p> <ul style="list-style-type: none"> • Manage up to 32 nodes in a cluster as a single virtual node • Enact end-to-end Flow Mapping across clusters, scaling to hundreds of nodes
Traffic Intelligence*	<p>Tunnel initiation (L2GRE, VXLAN)</p> <ul style="list-style-type: none"> • Backhaul across IP networks to central sites or cloud-based tools
	<p>Tunnel De-encapsulation (L2GRE, VXLAN)</p> <ul style="list-style-type: none"> • Facilitate traffic forwarding from cloud or virtual infrastructures
	<p>Header Stripping (MPLS, VLAN, VXLAN)</p> <ul style="list-style-type: none"> • Improve effectiveness of tools that don't understand all network protocols
	<p>Time stamping with PTP time synchronization**</p> <ul style="list-style-type: none"> • Facilitate accurate latency and performance analysis of network protocols and application transactions
Management	<p>Local and remote using:</p> <ul style="list-style-type: none"> • CLI (Telnet/SSH) • XML API (HTTP/HTTPS) • Fabric manager (HTTP/HTTPS) • SNMP (v1, v2, v3) • Syslog • Easy to manage via CLI for users already familiar with Cisco • Easy integration with applications using CLI or RESTful API • Support SDN paradigm • Manage and orchestrate from single "pane of glass" • Alerts can be received by any syslog server or SNMP manager

Management cont'd	<p>User access:</p> <ul style="list-style-type: none"> • Role-based access control (RBAC) <ul style="list-style-type: none"> – Multi-tenant user access – Flexible user/role defined privileges, screen views, and access • AAA security with local and remote authentication (RADIUS, TACACS+) • Adhere to corporate IT security policies • Meet corporate IT authentication policy
System	<p>Field replaceable hardware</p> <ul style="list-style-type: none"> • AC and DC power supplies • Fan trays • Achieve five nines highly available uptime <hr/> <p>Metrics and statistics</p> <ul style="list-style-type: none"> • Management of CPU resources • Switching ASIC resources • Port utilization • Flow map throughput • Facilitate troubleshooting • Guide capacity planning and traffic forward rules

* Requires Advanced Features license

** Only available on TA200

\$ Only available on TA25 and TA200

Maximum Capabilities: Speeds and Feeds

Attribute	GigaVUE-TA25-TA25E	GigaVUE-TA200/TA200E	GigaVUE-TA400
Size	“Small” (1RU)	“Medium” (2RU)	“Small” (1RU)
Throughput	2.0Tbps	6.4Tbps	12.8Tbps
# Port Cage Types			
SFP+	–	–	–
SFP28 ¹	48	–	–
QSFP+	–	–	–
QSFP28 ²	8	64	–
QSFP-DD ³	–	–	32
# of Ports & Speeds			
1Gb	48	–	–
10Gb	56*/80*	128*	128*
25Gb	56*/80*	128*	128*
40Gb	8	64	32
100Gb	8	64	128*
400Gb	–	–	32

Maximum Capabilities: Filter Entries

Filtering Type	GigaVUE-TA25-TA25E	GigaVUE-TA200/TA200E	GigaVUE-TA400
Flow Mapping Filtering			
Default (per chassis)	256	256	256
With Advanced Features license (per pseudo-slot)	18k	24k	22k
Egress Filtering			
Default (per chassis)	20	20	20
With Advanced Features license (per pseudo-slot)	448	448	450
Pseudo-slots (per chassis)	1/2	4	4

Product Specifications: Physical Dimensions and Weights

Product	Height	Width	Depth	Weight
GigaVUE-TA25/TA25E	1RU, 1.75 in (4.5 cm)	17.32 in (44 cm)	19.25 in (48.9 cm)	19.0 lbs (8.62 kg)
GigaVUE-TA200/TA200E	2RU, 3.48 in (8.84 cm)	17.32 in (44 cm)	21.25 in (54.0 cm)	33.60 lbs (15.24 kg)
GigaVUE-TA400	1RU, 1.75 in (4.42 cm)	17.32 in (44 cm)	21.25 in (54.0 cm)	23.0 lbs (10.5 kg)

Product Specifications: Power Consumption/Heat Output

Product	Max Specification
GigaVUE-TA25/TA25E	323W, 1102 BTU/hr / 400W, 1365 BTU/hr
GigaVUE-TA200/TA200E	1069W, 3645 BTU/hr / 800W, 2730 BTU/hr
GigaVUE-TA400	1147W, 3601 BTU/hr

Power Options:

- AC Power Supply: 100-240V AC, 50-60Hz
- DC Power Supply: -48V DC

Each GigaVUE TA Series node comes standard with dual load-sharing power supplies.
For detailed current specifications, please refer to the GigaVUE TA Series Hardware Installation Guide.

Product Specifications: Environmental Specifications

Aspect	GigaVUE-TA25/TA200/TA400
Operating temperature	32°F to 104°F (0°C to 40°C)
Operating relative humidity	10% to 90%, non-condensing
Recommended storage temperature	-4°F to 158°F (-20°C to 70°C)
Recommended storage relative humidity	15% to 85%, non-condensing
Altitude	Up to 16,405 ft (5.0 km)

Product Specifications: Compliance

Aspect	GigaVUE	Standard
Safety	TA200/TA200E/TA400	UL 60950-1; CSA C22.2 60950-1-07; IEC 60950-1; EN 62368-1
	TA25/TA25E	UL 62368-1; CSA C22.2 62368-1-14; IEC 62368-1 & 60950-1; EN 62368-1
Emissions	TA25	FCC Part 15, Class A; VCCI Class A; EN 55032/CISPR 32 Class A; Australia/New Zealand AS/NZS CISPR-32 Class A; KCC Class A; BSMI; EAC; Anatel
	TA25E	FCC Part 15, Class A; VCCI Class A; EN 55032/CISPR 32 Class A; Australia/New Zealand AS/NZS CISPR-32 Class A; BSMI
	TA200/TA400	FCC Part 15, Class A; VCCI Class A; EN 55032/CISPR 32 Class A; Australia/New Zealand AS/NZS CISPR-32 Class A; KCC Class A; BSMI; CCC; EAC; Anatel
	TA200E	FCC Part 15, Class A; VCCI Class A; KCC Class A; CCC; EAC
Immunity	TA25/TA25E/TA200/TA200E/TA400	ETSI EN300 386 V1.6.1:2012; EN61000-4-2, 4-3, 4-4, 4-5, 4-6, 4-8, 4-11, 3-2, 3-3
Environment	TA25/TA200/TA400/TA25E/TA200E	EU RoHS 6, RoHS 3 (EU 2015/863); NEBS Level 3
Security	TA25/TA400/TA200	FIPS 140-2 level 1, Common Criteria

Ordering Information

Legacy Model

	Part Number	Description
Base Unit	GVS-TAX21	GigaVUE-TA25 node, 8 40G/100G QSFP28 cages + 48 1G/10G/25G SFP28 cages, 2 power supplies, 4 fan trays, AC power, all ports enabled
	GVS-TAX22	GigaVUE-TA25 node, 8 40G/100G QSFP28 cages + 48 1G/10G/25G SFP28 cages, 2 power supplies, 4 fan trays, DC power, all ports enabled
	GVS-TAX21A	GigaVUE-TA25 node, 8 40G/100G QSFP28 cages + 48 1G/10G/25G SFP28 cages, 2 power supplies, 4 fan trays, AC power, 24 1G/10G/25G ports enabled
	GVS-TAX22A	GigaVUE-TA25 node, 8 40G/100G QSFP28 cages + 48 1G/10G/25G SFP28 cages, 2 power supplies, 4 fan trays, DC power, 24 1G/10G/25G ports enabled
	GVS-TAX22E	GigaVUE-TA25E node, 8 40G/100G QSFP28 cages + 48 1G/10G/25G SFP28 + cages, 2 power supplies, 6 fan trays, DC power, all ports enabled
	GVS-TAC21	GigaVUE-TA200 edge node, 32 100G ports enabled, 2 power supplies, 4 fan trays, AC power
	GVS-TAC21E	GigaVUE-TA200E node, 64 100G QSFP28 cages, 2 power supplies, 4 fan trays, AC power; 64 ports enabled
	GVS-TAC22	GigaVUE-TA200 edge node, 32 100G ports enabled, 2 power supplies, 4 fan trays, DC power
	GVS-TAC22E	GigaVUE-TA200E node, 64 100G QSFP28 cages, 2 power supplies, 4 fan trays, DC power; 64 ports enabled
	GVS-TAC41	GigaVUE-TA400 node, 32 400G QSFP-DD cages, 2 power supplies, 7 fan trays, AC power
	GVS-TAC42	GigaVUE-TA400 node, 32 400G QSFP-DD cages, 2 power supplies, 7 fan trays, DC power

Ordering Information, cont'd

Legacy Model

	Part Number	Description
Licenses	UPG-TAX00	Upgrade option for GVS-TAX01A/TAX02A to enable all GigaVUE-TA10 ports (48 10G and 4 40G)
	UPG-TAX20	Upgrade option for GVS-TAX25 to enable all GigaVUE-TA25 ports (48 1G/10G/25G + 8 40G/100G)
	IBP-TAX20	Inline Bypass License, GigaVUE-TA25, per node
	UPG-TAC24	Upgrade option to enable 24 GigaVUE-TA100 ports (24 100G)
	UPG-TAC32	Upgrade option to enable 32 GigaVUE-TA100 ports (32 100G); requires UPGTAC24
	UPG-TAC20	Upgrade option for GigaVUE-TA200 to enable all 64 100G ports
	CLS-TA100	Advanced Features License, GigaVUE-TA1/10 and 10G Whitebox, per node
	CLS-TAX20	Advanced Features License, GigaVUE-TA25, per node
	CLS-TAQ00	Advanced Features License, GigaVUE-TA40, per node
	CLS-TAC00	Advanced Features License, GigaVUE-TA100, per node
	CLS-TAC20	Advanced Features License, GigaVUE-TA200, per node
	IBP-TAC20	Inline Bypass License, GigaVUE-TA200, per node
	Power Supplies and Fans	PWR-TAXQ1
PWR-TAXQ2		Power Supply Module, GigaVUE-TA10, TA40, TA100 or HC1, DC, each
PWR-TAC01		Power Supply Module, GigaVUE-TA100, AC, each
PWR-TAC21		Power Supply Module, GigaVUE-TA200, AC
PWR-TAC22		Power Supply Module, GigaVUE-TA200, DC
FAN-TAC00		GigaVUE-TA100 Fan Assembly each (3 required)
FAN-TAC20		GigaVUE-TA200 Fan Assembly, each (4 required)
FAN-TAXQ0		GigaVUE-TA10 or TA40 Fan Assembly, each (2 required on TA10, 3 on TA40)
FAN-TA25		GigaVUE-TA25 Fan Assembly, each (4 required)
PWR-TAX21		Power Supply Module, GigaVUE-TA25, AC, each
PWR-TAX22		Power Supply Module, GigaVUE-TA25, DC, each

Ordering Information, cont'd

Software Centric Model

Product	Part Number	Description
GigaVUE-TA10	UPG-TAX00-SW-TM	Monthly subscription license to enable all GigaVUE-TA10 ports (48 10G + 4 40G) on GVS-TAX01A/TAX02A. Includes embedded Elite Support. Initial term must be 12 months or longer.
	CLS-TA100-SW-TM	Monthly subscription license to enable Advanced Features on GigaVUE-TA1/10 and 10G Whitebox, per node. Includes embedded Elite Support. Initial term must be 12 months or longer.
GigaVUE-TA25	GVS-TAX21-HW	GigaVUE-TA25 node, 8 40G/100G QSFP28 cages + 48 1G/10G/25G SFP28 cages, 2 power supplies, 4 fan trays, AC power, all ports enabled. Hardware only. Must pair with appropriate GigaVUE-OS Software License.
	GVS-TAX21-SW-TM	GigaVUE-OS Term Software License for GVS-TAX21-HW. Includes Elite Software Support Program.
	GVS-TAX21A-HW	GigaVUE-TA25 node, 8 40G/100G QSFP28 cages + 48 1G/10G/25G SFP28 cages, 2 power supplies, 4 fan trays, AC power, 24 10G/25G ports enabled. Hardware only. Must pair with appropriate GigaVUE-OS Software License.
	GVS-TAX21A-SW-TM	GigaVUE-OS Term Software License for GVS-TAX21A-HW. Includes Elite Software Support Program.
	GVS-TAX22-HW	GigaVUE-TA25 node, 8 40G/100G QSFP28 cages + 48 1G/10G/25G SFP28 cages, 2 power supplies, 4 fan trays, DC power, all ports enabled. Hardware only. Must pair with appropriate GigaVUE-OS Software License.
	GVS-TAX22-SW-TM	GigaVUE-OS Term Software License for GVS-TAX22-HW. Includes Elite Software Support Program.
	GVS-TAX22A-HW	GigaVUE-TA25 node, 8 40G/100G QSFP28 cages + 48 1G/10G/25G SFP28 cages, 2 power supplies, 4 fan trays, DC power, 24 10G/25G ports enabled. Hardware only. Must pair with appropriate GigaVUE-OS Software License.
	GVS-TAX22A-SW-TM	GigaVUE-OS Term Software License for GVS-TAX22A-HW. Includes Elite Software Support Program.
	GVS-TAX20-SW-TM	GigaVUE-OS Term Software License for GigaVUE-TA25 (GVS-TAX21-HW or GVS-TAX22-HW). All Ports enabled. Includes Elite-Plus Software Support Program.
	GVS-TAX21E-HW	GigaVUE-TA25E node, 8 40G/100G QSFP28 cages + 48 1G/10G/25G SFP28 + cages, 2 power supplies, 6 fan trays, AC power, all ports enabled. Hardware only. Must pair with appropriate GigaVUE-OS Software License.
	GVS-TAX22E-HW	GigaVUE-TA25E node, 8 40G/100G QSFP28 cages + 48 1G/10G/25G SFP28 + cages, 2 power supplies, 6 fan trays, DC power, all ports enabled. Hardware only. Must pair with appropriate GigaVUE-OS Software License.
	GVS-TAX20E-SW-TM	GigaVUE-OS Term Software License for GVS-TAX21E-HW or GVS-TAX22E-HW. Includes embedded Elite-Plus Software Support Program.
	GVS-TAX20A-SW-TM	GigaVUE-OS Term Software License for GigaVUE-TA25 (GVS-TAX21A-HW or GVS-TAX22A-HW). 24 10G/25G ports enabled. Includes Elite-Plus Software Support Program.

Ordering Information, cont'd

Software Centric Model, cont'd

Product	Part Number	Description
GigaVUE-TA25, cont'd	UPG-TAX20-SW-TM	Monthly subscription license to enable all GigaVUE-TAX25 ports (48 10G + 4 40G) on GVS-TAX25. Includes embedded Elite Support. Initial term must be 12 months or longer.
	CLS-TAX20-SW-TM	Monthly subscription license for Advanced Features License, GigaVUE-TA25, per node. Includes embedded Elite Support. Initial term must be 12 months or longer.
	IBP-TAX20-SW-TM	Monthly subscription license to enable Inline Bypass License on GigaVUE-TA25, per node. Includes embedded Elite Support. Initial term must be 12 months or longer.
GigaVUE-TA40	CLS-TAQ00-SW-TM	Monthly subscription license to enable Advanced Features on GigaVUE-TA40, per node. Includes embedded Elite Support. Initial term must be 12 months or longer.
GigaVUE-TA100	GVS-TAC01-SW-TM	GigaVUE-OS Term Software License for GVS-TAC01-HW. Includes Elite Software Support Program.
	GVS-TAC02-SW-TM	GigaVUE-OS Term Software License for GVS-TAC02-HW. Includes Elite Software Support Program.
	UPG-TAC24-SW-TM	Monthly subscription license to enable 24 GigaVUE-TA100 ports (24 100G). Includes embedded Elite Support. Initial term must be 12 months or longer.
	UPG-TAC32-SW-TM	Monthly subscription license to enable 32 GigaVUE-TA100 ports (32 100G). Includes embedded Elite Support. Initial term must be 12 months or longer.
	CLS-TAC00-SW-TM	Monthly subscription license to enable Advanced Features on GigaVUE-TA100, per node. Includes embedded Elite Support. Initial term must be 12 months or longer.
GigaVUE-TA200	GVS-TAC21-HW	GigaVUE-TA200 node, 64 100G QSFP28 cages, 2 power supplies, 4 fan trays, AC power; 32 ports enabled. Hardware only. Must pair with appropriate GigaVUE-OS Software License.
	GVS-TAC21-SW-TM	GigaVUE-OS Term Software License for GVS-TAC21-HW. Includes Elite Software Support Program.
	GVS-TAC22-HW	GigaVUE-TA200 node, 64 100G QSFP28 cages, 2 power supplies, 4 fan trays, DC power; 32 ports enabled. Hardware only. Must pair with appropriate GigaVUE-OS Software License.
	GVS-TAC22-SW-TM	GigaVUE-OS Term Software License for GVS-TAC22-HW. Includes Elite Software Support Program.
	GVS-TAC20-SW-TM	GigaVUE-OS Term Software License for GigaVUE-TA200 (GVS-TAC21-HW or GVS-TAC22-HW). Includes Elite-Plus Software Support Program.
	UPG-TAC20-SW-TM	Monthly subscription license to enable 64 GigaVUE-TA200 ports (64 100G). Includes embedded Elite Support. Initial term must be 12 months or longer.
	GVS-TAC21E-HW	GigaVUE-TA200E node, 64 100G QSFP28 cages, 2 power supplies, 4 fan trays, AC power; 64 ports enabled. Hardware only. Must pair with appropriate GigaVUE-OS Software License.

Ordering Information, cont'd

Software Centric Model, cont'd

Product	Part Number	Description
GigaVUE-TA200, cont'd	GVS-TAC22E-HW	GigaVUE-TA200E node, 64 100G QSFP28 cages, 2 power supplies, 4 fan trays, DC power; 64 ports enabled. Hardware only. Must pair with appropriate GigaVUE-OS Software License.
	GVS-TAC20E-SW-TM	GigaVUE-OS Term Software License for GVS-TAC21E-HW or GVS-TAC22EHW Includes embedded Elite-Plus Software Support Program.
	CLS-TAC20-SW-TM	Monthly subscription license for Advanced Features License, GigaVUE-TA200, per node. Includes embedded Elite Support. Initial term must be 12 months or longer.
	IBP-TAC20-SW-TM	Monthly subscription license to enable Inline Bypass License on GigaVUE-TA200, per node. Includes embedded Elite Support. Initial term must be 12 months or longer.
GigaVUE-TA400	GVS-TAC41-HW	GigaVUE-TA400 node, 32 400G QSFP28 cages, 2 power supplies, 7 fan trays, AC power; 32 ports enabled. Hardware only. Must pair with appropriate GigaVUE-OS Software License
	GVS-TAC42-HW	GigaVUE-TA400 node, 32 400G QSFP28 cages, 2 power supplies, 7 fan trays, DC power; 32 ports enabled. Hardware only. Must pair with appropriate GigaVUE-OS Software License
	GVS-TAC40-SW-TM	GigaVUE-OS Term Software License for GVS-TAC41-HW. Includes Elite Software Support Program
	CLS-TAC40-TM	Monthly subscription license to enable Advanced Features on GigaVUE-TA400, per node. Includes embedded Elite Support. Initial term must be 12 months or longer

Support

Gigamon offers a range of support and maintenance services. For details regarding Gigamon Limited Warranty and its Product Support and Software Maintenance Programs, visit gigamon.com/support-and-services/overview-and-benefits.

About Gigamon

Gigamon offers a deep observability pipeline that harnesses actionable network-derived intelligence to amplify the power of observability tools. This powerful combination helps IT organizations to assure security and compliance governance, speed root-cause analysis of performance bottlenecks, and lower operational overhead associated with managing hybrid and multi-cloud IT infrastructures. The result: modern enterprises realize the full transformational promise of the cloud. Gigamon serves more than 4,000 customers worldwide, including over 80 percent of Fortune 100 enterprises, nine of the 10 largest mobile network providers, and hundreds of governments and educational organizations worldwide. To learn more, please visit gigamon.com.



Worldwide Headquarters

3300 Olcott Street, Santa Clara, CA 95054 USA
+1 (408) 831-4000 | gigamon.com

© 2023 Gigamon. All rights reserved. Gigamon and Gigamon logos are trademarks of Gigamon in the United States and/or other countries. Gigamon trademarks can be found at gigamon.com/legal-trademarks. All other trademarks are the trademarks of their respective owners. Gigamon reserves the right to change, modify, transfer, or otherwise revise this publication without notice.